



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Maginfra Co., Ltd.
QR8228-D3 (AMD EPYC 9755)

SPECrate®2017_int_base = 2810

SPECrate®2017_int_peak = 2870

CPU2017 License: 9087


Test Sponsor: Maginfra Co., Ltd.

Tested by: Maginfra Co., Ltd.

Test Date: Jun-2026

Hardware Availability: Dec-2025

Software Availability: Jun-2025

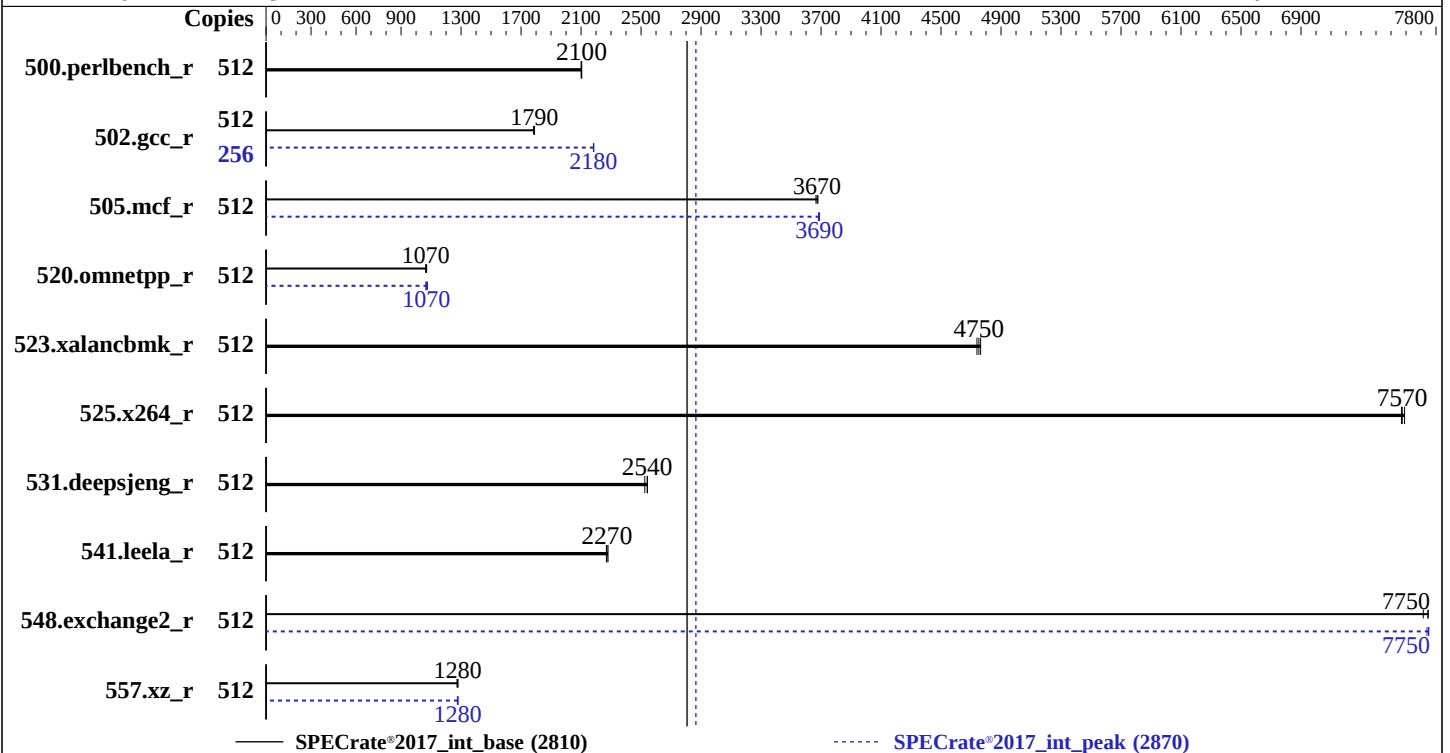

Hardware

CPU Name: AMD EPYC 9755
Max MHz: 4100
Nominal: 2700
Enabled: 256 cores, 2 chips, 2 threads/core
Orderable: 1,2 chips
Cache L1: 32 KB I + 48 KB D on chip per core
L2: 1 MB I+D on chip per core
L3: 512 MB I+D on chip per chip, 32 MB shared / 8 cores
Other: None
Memory: 1536 GB (24 x 64 GB 2Rx4 PC5-6400B-R)
Storage: 1 x 4 TB NVME SSD
Other: CPU Cooling: Air

Software

OS: SUSE Linux Enterprise Server 15 SP7
6.4.0-150700.51-default
Compiler: C/C++/Fortran: Version 5.0.0 of AOCC
Parallel: No
Firmware: Version 01.14.00 released Dec-2025
File System: xfs
System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: 32/64-bit
Other: None
Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Maginfraco., Ltd.

QR8228-D3 (AMD EPYC 9755)

SPECrate®2017_int_base = 2810

SPECrate®2017_int_peak = 2870

CPU2017 License: 9087

Test Sponsor: Maginfraco., Ltd.

Tested by: Maginfraco., Ltd.

Test Date: Jun-2026

Hardware Availability: Dec-2025

Software Availability: Jun-2025

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	512	<u>387</u>	<u>2100</u>	387	2100	388	2100	512	<u>387</u>	<u>2100</u>	387	2100	388	2100
502.gcc_r	512	406	1780	405	1790	<u>405</u>	<u>1790</u>	256	<u>166</u>	<u>2180</u>	166	2190	166	2180
505.mcf_r	512	225	3680	226	3670	<u>225</u>	<u>3670</u>	512	224	3690	225	3680	<u>224</u>	<u>3690</u>
520.omnetpp_r	512	627	1070	631	1060	<u>630</u>	<u>1070</u>	512	631	1060	624	1080	<u>628</u>	<u>1070</u>
523.xalancbmk_r	512	<u>114</u>	<u>4750</u>	114	4740	113	4760	512	<u>114</u>	<u>4750</u>	114	4740	113	4760
525.x264_r	512	118	7570	<u>118</u>	<u>7570</u>	118	7590	512	118	7570	<u>118</u>	<u>7570</u>	118	7590
531.deepsjeng_r	512	232	2530	<u>231</u>	<u>2540</u>	231	2540	512	232	2530	<u>231</u>	<u>2540</u>	231	2540
541.leela_r	512	372	2280	<u>373</u>	<u>2270</u>	374	2270	512	372	2280	<u>373</u>	<u>2270</u>	374	2270
548.exchange2_r	512	174	7720	173	7750	<u>173</u>	<u>7750</u>	512	173	7750	173	7740	<u>173</u>	<u>7750</u>
557.xz_r	512	434	1270	<u>433</u>	<u>1280</u>	432	1280	512	432	1280	<u>432</u>	<u>1280</u>	434	1280

SPECrate®2017_int_base = 2810

SPECrate®2017_int_peak = 2870

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at
<http://developer.amd.com/amd-aocc/>

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run
variability, 'sysctl -w kernel.randomize_va_space=0' run as root.

To enable Transparent Hugepages (THP) only on request for base runs,
'echo madvise > /sys/kernel/mm/transparent_hugepage/enabled' run as root.
To enable THP for all allocations for peak runs,
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.



SPEC CPU[®]2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Maginfra Co., Ltd.
QR8228-D3 (AMD EPYC 9755)

SPECrate[®]2017_int_base = 2810

SPECrate[®]2017_int_peak = 2870

CPU2017 License: 9087

Test Sponsor: Maginfra Co., Ltd.

Tested by: Maginfra Co., Ltd.

Test Date: Jun-2026

Hardware Availability: Dec-2025

Software Availability: Jun-2025

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

LD_LIBRARY_PATH =

"/home/CPU2017/amd_rate_aocc500_znver5_A_lib/lib:/home/CPU2017/amd_rate_aocc500_znver5_A_lib/lib32:"

MALLOC_CONF = "retain:true"

General Notes

Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Platform Notes

BIOS configuration:

NUMA nodes per socket = NPS4

Determinism Slider = Power

CTDP Control = Manual

CTDP = 500

Package Power Limit Control = Manual

Package Power Limit = 500

Sysinfo program /home/CPU2017/bin/sysinfo

Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197

running on localhost Sun Jun 15 02:02:39 2025

SUT (System Under Test) info as seen by some common utilities.

Table of contents

-
1. uname -a
 2. w
 3. Username
 4. ulimit -a
 5. sysinfo process ancestry
 6. /proc/cpuinfo
 7. lscpu
 8. numactl --hardware
 9. /proc/meminfo
 10. who -r
 11. Systemd service manager version: systemd 254 (254.24+suse.148.g83b9060b6e)
 12. Services, from systemctl list-unit-files
 13. Linux kernel boot-time arguments, from /proc/cmdline
 14. cpupower frequency-info
 15. tuned-adm active
 16. sysctl
 17. /sys/kernel/mm/transparent_hugepage
 18. /sys/kernel/mm/transparent_hugepage/khugepaged
 19. OS release
 20. Disk information
 21. /sys/devices/virtual/dmi/id
 22. dmidecode

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Maginfra Co., Ltd.
QR8228-D3 (AMD EPYC 9755)

SPECrate®2017_int_base = 2810

SPECrate®2017_int_peak = 2870

CPU2017 License: 9087

Test Sponsor: Maginfra Co., Ltd.

Tested by: Maginfra Co., Ltd.

Test Date: Jun-2026

Hardware Availability: Dec-2025

Software Availability: Jun-2025

Platform Notes (Continued)

23. BIOS

```
1. uname -a
Linux localhost 6.4.0-150700.51-default #1 SMP PREEMPT_DYNAMIC Wed Apr 30 21:35:43 UTC 2025 (6930611)
x86_64 x86_64 x86_64 GNU/Linux
```

```
2. w
02:02:39 up 1 min, 1 user, load average: 0.70, 0.29, 0.11
USER      TTY      FROM            LOGIN@   IDLE   JCPU   PCPU WHAT
root      tty1      -              02:01    39.00s 1.10s  0.20s /bin/bash ./amd_rate_aocc500_znver5_A1.sh
```

```
3. Username
From environment variable $USER: root
```

```
4. ulimit -a
core file size          (blocks, -c) unlimited
data seg size           (kbytes, -d) unlimited
scheduling priority     (-e) 0
file size                (blocks, -f) unlimited
pending signals         (-i) 6189251
max locked memory       (kbytes, -l) 2097152
max memory size         (kbytes, -m) unlimited
open files              (-n) 1024
pipe size                (512 bytes, -p) 8
POSIX message queues    (bytes, -q) 819200
real-time priority      (-r) 0
stack size              (kbytes, -s) unlimited
cpu time                (seconds, -t) unlimited
max user processes      (-u) 6189251
virtual memory          (kbytes, -v) unlimited
file locks              (-x) unlimited
```

```
5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize=42
login -- root
-bash
python3 ./run_amd_rate_aocc500_znver5_A1.py
/bin/bash ./amd_rate_aocc500_znver5_A1.sh
runcpu --config amd_rate_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 intrate
runcpu --configfile amd_rate_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 --nopower
--runmode rate --tune base:peak --size test:train:refrate intrate --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.071/temlogs/preenv.intrate.071.0.log --lognum 071.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/CPU2017
```

```
6. /proc/cpuinfo
model name      : AMD EPYC 9755 128-Core Processor
vendor_id      : AuthenticAMD
cpu family     : 26
model          : 2
stepping       : 1
microcode      : 0xb00215a
bugs           : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass srso
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Maginfra Co., Ltd.
QR8228-D3 (AMD EPYC 9755)

SPECrate®2017_int_base = 2810

SPECrate®2017_int_peak = 2870

CPU2017 License: 9087

Test Sponsor: Maginfra Co., Ltd.

Tested by: Maginfra Co., Ltd.

Test Date: Jun-2026

Hardware Availability: Dec-2025

Software Availability: Jun-2025

Platform Notes (Continued)

TLB size : 192 4K pages
cpu cores : 128
siblings : 256
2 physical ids (chips)
512 processors (hardware threads)
physical id 0: core ids 0-127
physical id 1: core ids 0-127
physical id 0: apicids 0-255
physical id 1: apicids 256-511

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.40.4:

Architecture:	x86_64
CPU op-mode(s):	32-bit, 64-bit
Address sizes:	52 bits physical, 57 bits virtual
Byte Order:	Little Endian
CPU(s):	512
On-line CPU(s) list:	0-511
Vendor ID:	AuthenticAMD
Model name:	AMD EPYC 9755 128-Core Processor
CPU family:	26
Model:	2
Thread(s) per core:	2
Core(s) per socket:	128
Socket(s):	2
Stepping:	1
Frequency boost:	enabled
CPU(s) scaling MHz:	101%
CPU max MHz:	2700.0000
CPU min MHz:	1500.0000
BogoMIPS:	5391.44
Flags:	fpu_vme_de_pse_tsc_msr_pae_mce_cx8_apic_sep_mtrr_pge_mca_cmov_pat pse36_clflush_mmx_fxsr_sse_sse2_ht_syscall_nx_mmxext_fxsr_opt_pdpe1gb rdtscp_lm_constant_tsc_rep_good_amd_lbr_v2_nopl_nonstop_tsc_cpuid extd_apicid_aperfmpperf_rapl_pni_pclmulqdq_monitor_ssse3_fma_cx16_pcid sse4_1_sse4_2_x2apic_movbe_popcnt_aes_xsave_avx_f16c_rdrand_lahf_lm cmp_legacy_svm_extapic_cr8_legacy_abm_sse4a_misalignsse_3dnowprefetch osvw_ibs_skinit_wdt_tce_topoext_perfctr_core_perfctr_nb_bpext perfctr_llc_mwaitx_cpb_cat_l3_cdp_l3_hw_pstate_ssbd_mba_perfmon_v2 ibrs_ibpb_stibp_ibrs_enhanced_vmmcall_fsgsbase_tsc_adjust_bmi1_avx2 smep_bmi2_erms_invpcid_cqm_rdt_a_avx512f_avx512dq_rdseed_adx_smap avx512ifma_clflushopt_clwb_avx512cd_sha_ni_avx512bw_avx512vl_xsaveopt xsavec_xgetbv1_xsaves_cqm_llc_cqm_occup_llc_cqm_mbm_total cqm_mbm_local_user_shstk_avx_vnni_avx512_bf16_clzero_irperf xsaveerptr_rdprr_wbnoinvd_amd_ppin_cppc_amd_ibpb_ret_arat_npt_lbrv svm_lock_nrip_save_tsc_scale_vmc_b_clean_flushbyasid_decodeassists pausefilter_pfthreshold_avic_v_vmsave_vmload_vgif_x2avic_v_spec_ctrl vnm_i_avx512vbmi_umip_pku_ospke_avx512_vbmi2_gfni_vaes_vpclmulqdq avx512_vnni_avx512_bitalg_avx512_vpopcndtq_la57_rdpid_bus_lock_detect movdiri_movdir64b_overflow_recov_succor_smca_fsrn_avx512_vp2intersect flush_l1d_debug_swap_hv_inuse_wr_allowed_srso_user_kernel_no amd_lbr_pmc_freeze
Virtualization:	AMD-V
L1d cache:	12 MiB (256 instances)
L1i cache:	8 MiB (256 instances)
L2 cache:	256 MiB (256 instances)

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Maginfraco., Ltd.
QR8228-D3 (AMD EPYC 9755)

SPECrate®2017_int_base = 2810

SPECrate®2017_int_peak = 2870

CPU2017 License: 9087

Test Sponsor: Maginfraco., Ltd.

Tested by: Maginfraco., Ltd.

Test Date: Jun-2026

Hardware Availability: Dec-2025

Software Availability: Jun-2025

Platform Notes (Continued)

L3 cache: 1 GiB (32 instances)
NUMA node(s): 8
NUMA node0 CPU(s): 0-31,256-287
NUMA node1 CPU(s): 32-63,288-319
NUMA node2 CPU(s): 64-95,320-351
NUMA node3 CPU(s): 96-127,352-383
NUMA node4 CPU(s): 128-159,384-415
NUMA node5 CPU(s): 160-191,416-447
NUMA node6 CPU(s): 192-223,448-479
NUMA node7 CPU(s): 224-255,480-511
Vulnerability Gather data sampling: Not affected
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Reg file data sampling: Not affected
Vulnerability Retbleed: Not affected
Vulnerability Spec rstack overflow: Mitigation; IBPB on VMEXIT only
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced / Automatic IBRS; IBPB conditional; STIBP always-on; RSB filling; PBRBS-eIBRS Not affected; BHI Not affected
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	12M	12	Data	1	64	1	64
L1i	32K	8M	8	Instruction	1	64	1	64
L2	1M	256M	16	Unified	2	1024	1	64
L3	32M	1G	16	Unified	3	32768	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 8 nodes (0-7)
node 0 cpus: 0-31,256-287
node 0 size: 192935 MB
node 0 free: 192378 MB
node 1 cpus: 32-63,288-319
node 1 size: 193518 MB
node 1 free: 192961 MB
node 2 cpus: 64-95,320-351
node 2 size: 193518 MB
node 2 free: 193049 MB
node 3 cpus: 96-127,352-383
node 3 size: 193518 MB
node 3 free: 193001 MB
node 4 cpus: 128-159,384-415
node 4 size: 193518 MB
node 4 free: 192965 MB
node 5 cpus: 160-191,416-447
node 5 size: 193518 MB
node 5 free: 193009 MB
node 6 cpus: 192-223,448-479
node 6 size: 193518 MB
node 6 free: 192992 MB
node 7 cpus: 224-255,480-511
node 7 size: 193290 MB

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Maginfra Co., Ltd.
QR8228-D3 (AMD EPYC 9755)

SPECrate®2017_int_base = 2810

SPECrate®2017_int_peak = 2870

CPU2017 License: 9087

Test Sponsor: Maginfra Co., Ltd.

Tested by: Maginfra Co., Ltd.

Test Date: Jun-2026

Hardware Availability: Dec-2025

Software Availability: Jun-2025

Platform Notes (Continued)

node 7 free: 192798 MB

node distances:

node	0	1	2	3	4	5	6	7
0:	10	12	12	12	32	32	32	32
1:	12	10	12	12	32	32	32	32
2:	12	12	10	12	32	32	32	32
3:	12	12	12	10	32	32	32	32
4:	32	32	32	32	10	12	12	12
5:	32	32	32	32	12	10	12	12
6:	32	32	32	32	12	12	10	12
7:	32	32	32	32	12	12	12	10

9. /proc/meminfo

MemTotal: 1584476116 kB

10. who -r

run-level 3 Jun 15 02:01

11. Systemd service manager version: systemd 254 (254.24+suse.148.g83b9060b6e)

Default Target Status

multi-user running

12. Services, from systemctl list-unit-files

STATE UNIT FILES

enabled YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron display-manager getty@ irqbalance
issue-generator kbdsettings klog lvm2-monitor nsd nvme-fc-boot-connections
nvme-fc-autoconnect postfix purge-kernels rollback rsyslog smartd systemd-pstore

enabled-runtime systemd-remount-fs

disabled autofs autoyast-initscripts blk-availability boot-sysctl ca-certificates chrony-wait
chronyd console-getty cups cups-browsed debug-shell ebttables exchange-bmc-os-info
firewalld fsidd gpm grub2-once haveged hwloc-dump-hwdata ipmi ipmievdev issue-add-ssh-keys
kexec-load lunmask man-db-create multipathd nfs nfs-blkmap rpcbind rpmconfigcheck rsyncd
serial-getty@ smartd_generate_opts snmpd snmptrapd sshd systemd-boot-check-no-failures
systemd-confext systemd-network-generator systemd-sysext systemd-time-wait-sync
systemd-timesyncd tuned udisks2 vncserver@ wicked wickedd-auto4 wickedd-dhcp4
wickedd-dhcp6 wickedd-nanny

indirect

systemd-userdbd wickedd

13. Linux kernel boot-time arguments, from /proc/cmdline

BOOT_IMAGE=/boot/vmlinuz-6.4.0-150700.51-default

root=UUID=b599d87c-474e-4c72-b781-36d0bcdcf18d

splash=silent

mitigations=auto

quiet

security=apparmor

14. cpupower frequency-info

analyzing CPU 379:

current policy: frequency should be within 1.50 GHz and 2.70 GHz.

The governor "performance" may decide which speed to use
within this range.

boost state support:

Supported: yes

Active: yes

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Maginfraco., Ltd.
QR8228-D3 (AMD EPYC 9755)

SPECrate®2017_int_base = 2810

SPECrate®2017_int_peak = 2870

CPU2017 License: 9087

Test Sponsor: Maginfraco., Ltd.

Tested by: Maginfraco., Ltd.

Test Date: Jun-2026

Hardware Availability: Dec-2025

Software Availability: Jun-2025

Platform Notes (Continued)

15. tuned-adm active

It seems that tuned daemon is not running, preset profile is not activated.
Preset profile: throughput-performance

16. sysctl

kernel.numa_balancing	1
kernel.randomize_va_space	0
vm.compaction_proactiveness	20
vm.dirty_background_bytes	0
vm.dirty_background_ratio	10
vm.dirty_bytes	0
vm.dirty_expire_centisecs	3000
vm.dirty_ratio	8
vm.dirty_writeback_centisecs	500
vm.dirtytime_expire_seconds	43200
vm.extfrag_threshold	500
vm.min_unmapped_ratio	1
vm.nr_hugepages	0
vm.nr_hugepages_mempolicy	0
vm.nr_overcommit_hugepages	0
vm.swappiness	1
vm.watermark_boost_factor	15000
vm.watermark_scale_factor	10
vm.zone_reclaim_mode	1

17. /sys/kernel/mm/transparent_hugepage

defrag	[always]	defer	defer+madvise	madvise	never
enabled	[always]	madvise	never		
hpage_pmd_size	2097152				
shmem_enabled	always	within_size	advise	[never]	deny force

18. /sys/kernel/mm/transparent_hugepage/khugepaged

alloc_sleep_millisecs	60000
defrag	1
max_ptes_none	511
max_ptes_shared	256
max_ptes_swap	64
pages_to_scan	4096
scan_sleep_millisecs	10000

19. OS release

From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP7

20. Disk information

SPEC is set to: /home/CPU2017

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/nvme0n1p2	xfs	929G	39G	891G	5%	/

21. /sys/devices/virtual/dmi/id

Vendor:	Maginfraco.
Product:	QR8228-D3

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Maginfra Co., Ltd.
QR8228-D3 (AMD EPYC 9755)

SPECrate®2017_int_base = 2810

SPECrate®2017_int_peak = 2870

CPU2017 License: 9087

Test Sponsor: Maginfra Co., Ltd.

Tested by: Maginfra Co., Ltd.

Test Date: Jun-2026

Hardware Availability: Dec-2025

Software Availability: Jun-2025

Platform Notes (Continued)

Product Family: Not specified
Serial: 00000000

22. dmidecode

Additional information from dmidecode 3.6 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

12x Samsung M321R8GA0PB2-CCPEC 64 GB 2 rank 6400
11x Samsung M321R8GA0PB2-CCPPC 64 GB 2 rank 6400
1x Samsung M321R8GA0PB2-CCPWC 64 GB 2 rank 6400

23. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: American Megatrends International, LLC.
BIOS Version: 01.14.00
BIOS Date: 12/25/2025

Compiler Version Notes

C | 502.gcc_r(peak)

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

C | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak) 525.x264_r(base, peak)
| 557.xz_r(base, peak)

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

C | 502.gcc_r(peak)

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

C | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak) 525.x264_r(base, peak)
| 557.xz_r(base, peak)

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Maginfra Co., Ltd.
QR8228-D3 (AMD EPYC 9755)

SPECrate®2017_int_base = 2810

SPECrate®2017_int_peak = 2870

CPU2017 License: 9087

Test Sponsor: Maginfra Co., Ltd.

Tested by: Maginfra Co., Ltd.

Test Date: Jun-2026

Hardware Availability: Dec-2025

Software Availability: Jun-2025

Compiler Version Notes (Continued)

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

```
=====  
C++      | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base, peak) 531.deepsjeng_r(base, peak)  
          | 541.leela_r(base, peak)  
=====
```

```
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)  
Target: x86_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin  
=====
```

```
=====  
Fortran  | 548.exchange2_r(base, peak)  
=====
```

```
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)  
Target: x86_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin  
=====
```

Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Base Portability Flags

```
500.perlbench_r: -DSPEC_LINUX_X64 -DSPEC_LP64  
502.gcc_r: -DSPEC_LP64  
505.mcf_r: -DSPEC_LP64  
520.omnetpp_r: -DSPEC_LP64  
523.xalancbmk_r: -DSPEC_LINUX -DSPEC_LP64  
525.x264_r: -DSPEC_LP64  
531.deepsjeng_r: -DSPEC_LP64  
541.leela_r: -DSPEC_LP64  
548.exchange2_r: -DSPEC_LP64  
557.xz_r: -DSPEC_LP64
```



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Maginfraco., Ltd.

QR8228-D3 (AMD EPYC 9755)

SPECrate®2017_int_base = 2810

SPECrate®2017_int_peak = 2870

CPU2017 License: 9087

Test Sponsor: Maginfraco., Ltd.

Tested by: Maginfraco., Ltd.

Test Date: Jun-2026

Hardware Availability: Dec-2025

Software Availability: Jun-2025

Base Optimization Flags

C benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-ldist-scalar-expand -fenable-aggressive-gather
-Wl,-mllvm -Wl,-extra-inliner -z muldefs -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -fno-PIE -no-pie -flto
-fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining
-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lflang
-lamdalloc-ext -ldl
```

C++ benchmarks:

```
-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-do-block-reorder=advanced -z muldefs -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -flto -mllvm -unroll-threshold=100
-mllvm -loop-unswitch-threshold=2000000
-mllvm -reduce-array-computations=3 -zopt -fno-PIE -no-pie
-fvirtual-function-elimination -fvisibility=hidden
-mllvm -do-block-reorder=advanced -lamdlibm -lflang -lamdalloc-ext
-ldl
```

Fortran benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-inline-recursion=4 -Wl,-mllvm -Wl,-lsr-in-nested-loop
-Wl,-mllvm -Wl,-enable-iv-split -z muldefs -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -flto
-fepilog-vectorization-of-inductions -mllvm -optimize-strided-mem-cost
-floop-transform -mllvm -unroll-aggressive -mllvm -unroll-threshold=500
-lamdlibm -lflang -lamdalloc -ldl
```

Base Other Flags

C benchmarks:

-Wno-unused-command-line-argument

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Maginfra Co., Ltd.

QR8228-D3 (AMD EPYC 9755)

SPECrate®2017_int_base = 2810

SPECrate®2017_int_peak = 2870

CPU2017 License: 9087

Test Sponsor: Maginfra Co., Ltd.

Tested by: Maginfra Co., Ltd.

Test Date: Jun-2026

Hardware Availability: Dec-2025

Software Availability: Jun-2025

Peak Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Peak Portability Flags

500.perlbench_r: -DSPEC_LINUX_X64 -DSPEC_LP64

502.gcc_r: -D_FILE_OFFSET_BITS=64

505.mcf_r: -DSPEC_LP64

520.omnetpp_r: -DSPEC_LP64

523.xalancbmk_r: -DSPEC_LINUX -DSPEC_LP64

525.x264_r: -DSPEC_LP64

531.deepsjeng_r: -DSPEC_LP64

541.leela_r: -DSPEC_LP64

548.exchange2_r: -DSPEC_LP64

557.xz_r: -DSPEC_LP64

Peak Optimization Flags

C benchmarks:

500.perlbench_r: basepeak = yes

502.gcc_r: -m32 -flto -Wl,-mllvm -Wl,-ldist-scalar-expand
-fenable-aggressive-gather -Wl,-mllvm -Wl,-extra-inliner
-z muldefs -Ofast -march=znver5 -fveclib=AMDLIBM
-ffast-math -fstruct-layout=7 -mllvm -unroll-threshold=50
-fremap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt -fgnu89-inline
-lamdalloc

505.mcf_r: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-extra-inliner -Ofast -march=znver5
-fveclib=AMDLIBM -ffast-math -flto -fstruct-layout=7
-mllvm -unroll-threshold=50 -fremap-arrays -fstrip-mining

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Maginfraco., Ltd.

SPECrate®2017_int_base = 2810

QR8228-D3 (AMD EPYC 9755)

SPECrate®2017_int_peak = 2870

CPU2017 License: 9087

Test Sponsor: Maginfraco., Ltd.

Tested by: Maginfraco., Ltd.

Test Date: Jun-2026

Hardware Availability: Dec-2025

Software Availability: Jun-2025

Peak Optimization Flags (Continued)

505.mcf_r (continued):

-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt -lamdlibm
-lflang -lamdalloc-ext -ldl

525.x264_r: basepeak = yes

557.xz_r: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-ldist-scalar-expand
-fenable-aggressive-gather -Wl,-mllvm -Wl,-extra-inliner
-Ofast -march=znver5 -fveclib=AMDLIBM -ffast-math -flto
-fstruct-layout=7 -mllvm -unroll-threshold=50
-fremap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt -lamdlibm
-lflang -lamdalloc-ext -ldl

C++ benchmarks:

520.omnetpp_r: -m64 -std=c++14
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-do-block-reorder=advanced -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -flto
-mllvm -unroll-threshold=100
-mllvm -reduce-array-computations=3 -zopt -fno-PIE
-no-pie -fvirtual-function-elimination -fvisibility=hidden
-mllvm -do-block-reorder=advanced -lamdlibm -lamdalloc-ext
-ldl

523.xalancbmk_r: basepeak = yes

531.deepsjeng_r: basepeak = yes

541.leela_r: basepeak = yes

Fortran benchmarks:

-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-inline-recursion=4 -Wl,-mllvm -Wl,-lsr-in-nested-loop
-Wl,-mllvm -Wl,-enable-iv-split -O3 -march=znver5 -fveclib=AMDLIBM
-ffast-math -flto -fepilog-vectorization-of-inductions
-mllvm -optimize-strided-mem-cost -floop-transform
-mllvm -unroll-aggressive -mllvm -unroll-threshold=500 -lamdlibm
-lflang -lamdalloc -ldl



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Maginfra Co., Ltd.

QR8228-D3 (AMD EPYC 9755)

SPECrate®2017_int_base = 2810

SPECrate®2017_int_peak = 2870

CPU2017 License: 9087

Test Sponsor: Maginfra Co., Ltd.

Tested by: Maginfra Co., Ltd.

Test Date: Jun-2026

Hardware Availability: Dec-2025

Software Availability: Jun-2025

Peak Other Flags

C benchmarks (except as noted below):

-Wno-unused-command-line-argument

502.gcc_r: -L/usr/lib32 -Wno-unused-command-line-argument

-L/home/work/cpu2017/v119/aocc5/1316/amd_rate_aocc500_znver5_A_lib/lib32

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc500-flags.2024-10-10.html>

<http://www.spec.org/cpu2017/flags/Maginfra-Platform-Settings-amd-V1.0.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc500-flags.2024-10-10.xml>

<http://www.spec.org/cpu2017/flags/Maginfra-Platform-Settings-amd-V1.0.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2025-06-15 02:02:39-0400.

Report generated on 2026-07-14 17:26:17 by CPU2017 PDF formatter v6716.

Originally published on 2026-07-14.