



SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL325 Gen12

(2.70 GHz, AMD EPYC 9755)

SPECrate®2026_fp_base = 416

SPECrate®2026_fp_peak = 416

CPU2026 License: 3


Test Sponsor: HPE

Tested by: HPE

Test Date: Jan-2026

Hardware Availability: Jul-2025

Software Availability: Jan-2026

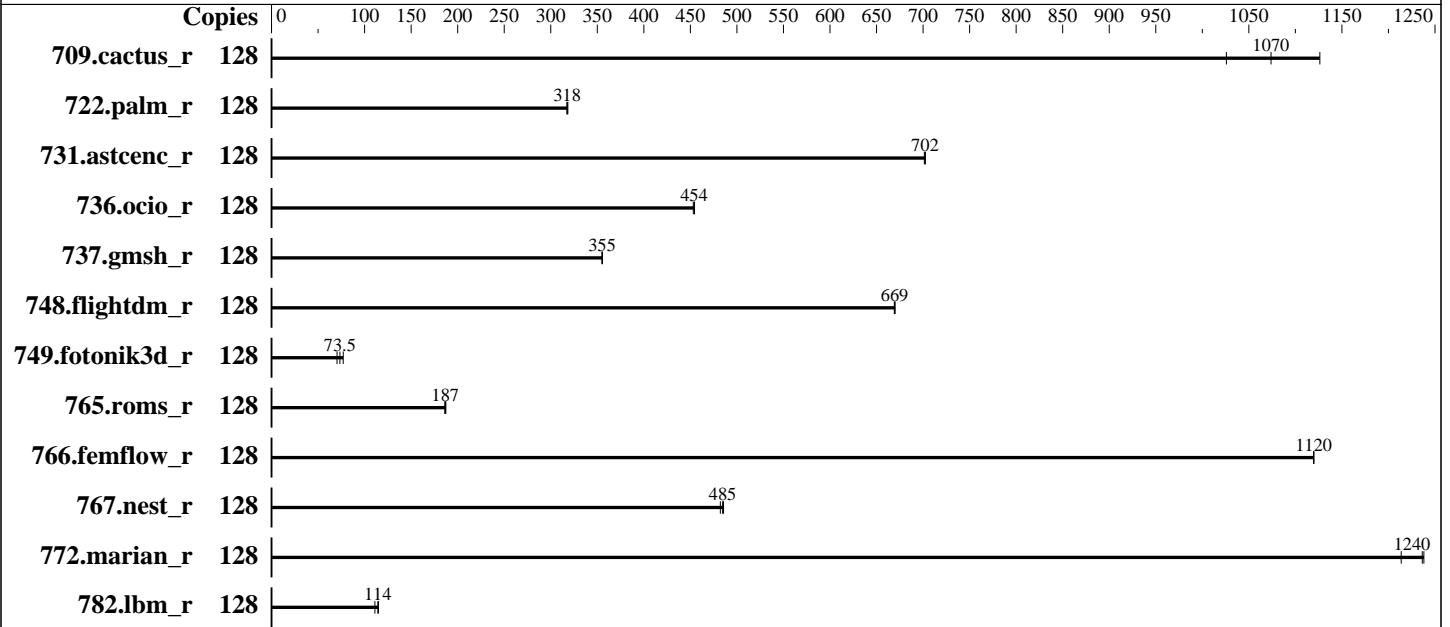

Hardware

CPU Name: AMD EPYC 9755
 Max MHz: 4100
 Nominal: 2700
 Enabled: 128 cores, 1 chip, 2 threads/core
 Orderable: 1 Chip
 Cache L1: 32 KB I + 48 KB D on chip per core
 L2: 1 MB I+D on chip per core
 L3: 512 MB I+D on chip per chip,
 32 MB shared / 8 cores
 Other: None
 Memory: 1536 GB (12 x 128 GB 2Rx4 PC5-6400B-R,
 running at 5200)
 Storage: 1 x 1.6 TB NVMe SSD
 Cooling: CLC
 Other: None

Software

OS: Ubuntu 24.04.3 LTS
 Kernel 6.8.0-90-generic
 Compiler: C/C++/Fortran: Version 5.1.0 of AOCC
 Compiler Category: Vendor
 Firmware: HPE BIOS Version v1.34
 released Nov-2025
 File System: ext4
 System State: Run level 5 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other: None
 Power Management: BIOS and OS is set to prefer performance at the
 cost of additional power usage



SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL325 Gen12
(2.70 GHz, AMD EPYC 9755)

SPECrate®2026_fp_base = 416

SPECrate®2026_fp_peak = 416

CPU2026 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Jan-2026
Hardware Availability: Jul-2025
Software Availability: Jan-2026

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
709.cactus_r	128	97.5	1130	<u>102</u>	<u>1070</u>	107	1030	128	97.5	1130	<u>102</u>	<u>1070</u>	107	1030
722.palm_r	128	<u>532</u>	<u>318</u>	531	318	532	317	128	<u>532</u>	<u>318</u>	531	318	532	317
731.ascenc_r	128	153	701	<u>153</u>	<u>702</u>	153	702	128	153	701	<u>153</u>	<u>702</u>	153	702
736.ocio_r	128	<u>247</u>	<u>454</u>	246	454	247	453	128	<u>247</u>	<u>454</u>	246	454	247	453
737.gmsh_r	128	165	355	<u>165</u>	<u>355</u>	165	355	128	165	355	<u>165</u>	<u>355</u>	165	355
748.flightdm_r	128	137	670	137	669	<u>137</u>	<u>669</u>	128	137	670	137	669	<u>137</u>	<u>669</u>
749.fotonik3d_r	128	1921	77.0	<u>2014</u>	<u>73.5</u>	2103	70.4	128	1921	77.0	<u>2014</u>	<u>73.5</u>	2103	70.4
765.roms_r	128	<u>1079</u>	<u>187</u>	1076	187	1083	186	128	<u>1079</u>	<u>187</u>	1076	187	1083	186
766.femflow_r	128	168	1120	<u>168</u>	<u>1120</u>	168	1120	128	168	1120	<u>168</u>	<u>1120</u>	168	1120
767.nest_r	128	210	482	209	486	<u>209</u>	<u>485</u>	128	210	482	209	486	<u>209</u>	<u>485</u>
772.marian_r	128	167	1210	<u>163</u>	<u>1240</u>	163	1240	128	167	1210	<u>163</u>	<u>1240</u>	163	1240
782.lbm_r	128	639	115	<u>642</u>	<u>114</u>	660	111	128	639	115	<u>642</u>	<u>114</u>	660	111

SPECrate®2026_fp_base = 416

SPECrate®2026_fp_peak = 416

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at
<http://developer.amd.com/amd-aocc/>

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run

(Continued on next page)



SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL325 Gen12
(2.70 GHz, AMD EPYC 9755)

SPECrate®2026_fp_base = 416

SPECrate®2026_fp_peak = 416

CPU2026 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jan-2026

Hardware Availability: Jul-2025

Software Availability: Jan-2026

Operating System Notes (Continued)

variability, 'sysctl -w kernel.randomize_va_space=0' run as root.
To enable Transparent Hugepages (THP) for all allocations,
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH =
"/home/cpu2026/amd_rate_aocc510_znver5_A_lib/lib:/home/cpu2026/amd_rate_aocc510_znver5_A_lib/lib32:"
MALLOC_CONF = "retain:true"

General Notes

Binaries were compiled on a system with 2x AMD EPYC Venice256 CPU + 2TiB
Memory using Ubuntu 24.04
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Platform Notes

BIOS Configurations : Parameters are selected in the order shown below
Workload Profile set to High Performance Compute (HPC)
Determinism Control set to Manual
Performance Determinism set to Power Deterministic
Memory Patrol Scrubbing set to Disabled
ACPI CST C2 Latency set to 18 microseconds
Last-Level Cache (LLC) as NUMA Node set to Enabled
NUMA memory domains per socket set to Four memory domains per socket
Thermal Configuration set to Enhanced CPU Cooling
AMD Periodic Directory Rinse set to Periodic
Workload Profile set to Custom
Power Regulator set to OS Control Mode

Sysinfo program /home/cpu2026/bin/sysinfo
Rev: 069f95da7e7f5d81b2ce48a82150e54f
running on admin1 Thu Jan 29 06:49:04 2026

(Continued on next page)



SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL325 Gen12

(2.70 GHz, AMD EPYC 9755)

SPECrate®2026_fp_base = 416

SPECrate®2026_fp_peak = 416

CPU2026 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Jan-2026
Hardware Availability: Jul-2025
Software Availability: Jan-2026

Platform Notes (Continued)

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. `uname -srvm`
2. `w`
3. Username
4. `ulimit -a`
5. `sysinfo process ancestry`
6. `/proc/cpuinfo`
7. `lscpu`
8. `numactl --hardware`
9. `/proc/meminfo`
10. `who -r`
11. Systemd service manager version: `systemd 255 (255.4-lubuntu8.12)`
12. Services, from `systemctl list-unit-files`
13. Linux kernel boot-time arguments, from `/proc/cmdline`
14. `cpupower frequency-info`
15. `tuned-adm active`
16. `sysctl`
17. `/sys/kernel/mm/transparent_hugepage`
18. `/sys/kernel/mm/transparent_hugepage/khugepaged`
19. OS release
20. Disk information
21. `/sys/devices/virtual/dmi/id`
22. `dmidecode`
23. BIOS

1. `uname -srvm`
Linux 6.8.0-90-generic #91-Ubuntu SMP PREEMPT_DYNAMIC Tue Nov 18 14:14:30 UTC 2025 x86_64

2. `w`
06:49:04 up 1:40, 7 users, load average: 0.12, 0.03, 0.01
USER TTY FROM LOGIN@ IDLE JCPU PCPU WHAT
admin1 172.16.0.111 06:48 11.00s 0.00s 0.01s sshd: admin1 [priv]
admin1 172.16.0.111 06:48 11.00s 0.00s 0.01s sshd: admin1 [priv]
admin1 172.16.0.111 06:48 11.00s 0.00s 0.01s sshd: admin1 [priv]
admin1 172.16.0.111 06:48 11.00s 0.00s 0.01s sshd: admin1 [priv]
admin1 172.16.0.100 05:17 11.00s 0.00s 0.03s sshd: admin1 [priv]
admin1 172.16.0.100 05:15 11.00s 0.00s 0.03s sshd: admin1 [priv]
admin1 tty1 - 05:11 1:37m 0.05s 0.02s -bash

(Continued on next page)



SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL325 Gen12
(2.70 GHz, AMD EPYC 9755)

SPECrate®2026_fp_base = 416

SPECrate®2026_fp_peak = 416

CPU2026 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jan-2026

Hardware Availability: Jul-2025

Software Availability: Jan-2026

Platform Notes (Continued)

3. Username

From environment variable \$USER: root
From the command 'logname': adminl

4. ulimit -a

```
time(seconds)          unlimited
file(blocks)           unlimited
data(kbytes)           unlimited
stack(kbytes)          unlimited
coredump(blocks)       0
memory(kbytes)         unlimited
locked memory(kbytes)  2097152
process                6190756
nofiles                1024
vmemory(kbytes)        unlimited
locks                  unlimited
rtprio                 0
```

5. sysinfo process ancestry

```
/sbin/init
sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups
sshd: adminl [priv]
sshd: adminl@notty
/bin/bash $SPEC/run_fprate_sh.sh
sudo ./run_fprate.py
python3 ./run_fprate.py
/bin/bash ./amd_rate_aocc510_znver5_A1.sh
runcpu --config amd_rate_aocc510_znver5_A1.cfg --tune base --reportable --iterations 3 fprate
runcpu --configfile amd_rate_aocc510_znver5_A1.cfg --tune base --reportable --iterations 3 --nopower
--runmode rate --tune base --size test:train:refrate fprate --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2026.001/templogs/preenv.fprate.001.0.log --lognum 001.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2026
```

6. /proc/cpuinfo

```
model name      : AMD EPYC 9755 128-Core Processor
vendor_id       : AuthenticAMD
cpu family      : 26
model           : 2
stepping        : 1
microcode       : 0xb00215a
bugs            : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass
TLB size        : 192 4K pages
cpu cores       : 128
```

(Continued on next page)



SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL325 Gen12
(2.70 GHz, AMD EPYC 9755)

SPECrate®2026_fp_base = 416

SPECrate®2026_fp_peak = 416

CPU2026 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jan-2026

Hardware Availability: Jul-2025

Software Availability: Jan-2026

Platform Notes (Continued)

```
siblings          : 256
1 physical ids (chips)
256 processors (hardware threads)
physical id 0: core ids 0-127
physical id 0: apicids 0-255
```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.39.3:

```
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:         52 bits physical, 57 bits virtual
Byte Order:            Little Endian
CPU(s):                256
On-line CPU(s) list:   0-255
Vendor ID:             AuthenticAMD
BIOS Vendor ID:        Advanced Micro Devices, Inc.
Model name:            AMD EPYC 9755 128-Core Processor
BIOS Model name:       AMD EPYC 9755 128-Core Processor      CPU @ 2.7GHz
BIOS CPU family:       107
CPU family:            26
Model:                 2
Thread(s) per core:    2
Core(s) per socket:    128
Socket(s):              1
Stepping:              1
Frequency boost:       enabled
CPU(s) scaling MHz:    101%
CPU max MHz:           2700.0000
CPU min MHz:           1500.0000
BogoMIPS:              5392.00
```

```
Flags:                  fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb
rdtscp lm constant_tsc rep_good amd_lbr_v2 nopl nonstop_tsc cpuid
extd_apicid aperfmperf rapl pni pclmulqdq monitor ssse3 fma cx16 pcid
sse4_1 sse4_2 x2apic movbe popcnt aes xsave avx f16c rdrand lahf_lm
cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch
osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext
perfctr_llc mwaitx cpb cat_l3 cdp_l3 hw_pstate ssbd mba perfmon_v2
ibrs ibpb stibp ibrs_enhanced vmmcall fsgsbase tsc_adjust bmi1 avx2
smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap
avx512ifma clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt
xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
cqm_mbm_local user_shstk avx_vnni avx512_bf16 clzero irperf
```

(Continued on next page)



SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL325 Gen12

(2.70 GHz, AMD EPYC 9755)

SPECrate®2026_fp_base = 416

SPECrate®2026_fp_peak = 416

CPU2026 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Jan-2026
Hardware Availability: Jul-2025
Software Availability: Jan-2026

Platform Notes (Continued)

xsaveerptr rdpru wbnoinvd amd_ppin cpcp amd_ibpb_ret arat npt lbrv
svm_lock nrip_save tsc_scale vmcb_clean flushbyasid decodeassists
pausefilter pfthreshold avic v_vmsave_vmload vgif x2avic v_spec_ctrl
vnmi avx512vbmi umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq
avx512_vnni avx512_bitalg avx512_vpopcntdq la57 rdpid bus_lock_detect
movdiri movdir64b overflow_recov succor smca fsrm avx512_vp2intersect
flush_lld debug_swap

Virtualization: AMD-V

L1d cache: 6 MiB (128 instances)

L1i cache: 4 MiB (128 instances)

L2 cache: 128 MiB (128 instances)

L3 cache: 512 MiB (16 instances)

NUMA node(s): 16

NUMA node0 CPU(s): 0-7,128-135

NUMA node1 CPU(s): 8-15,136-143

NUMA node2 CPU(s): 16-23,144-151

NUMA node3 CPU(s): 24-31,152-159

NUMA node4 CPU(s): 32-39,160-167

NUMA node5 CPU(s): 40-47,168-175

NUMA node6 CPU(s): 48-55,176-183

NUMA node7 CPU(s): 56-63,184-191

NUMA node8 CPU(s): 64-71,192-199

NUMA node9 CPU(s): 72-79,200-207

NUMA node10 CPU(s): 80-87,208-215

NUMA node11 CPU(s): 88-95,216-223

NUMA node12 CPU(s): 96-103,224-231

NUMA node13 CPU(s): 104-111,232-239

NUMA node14 CPU(s): 112-119,240-247

NUMA node15 CPU(s): 120-127,248-255

Vulnerability Gather data sampling: Not affected

Vulnerability Itlb multihit: Not affected

Vulnerability L1tf: Not affected

Vulnerability Mds: Not affected

Vulnerability Meltdown: Not affected

Vulnerability Mmio stale data: Not affected

Vulnerability Reg file data sampling: Not affected

Vulnerability Retbleed: Not affected

Vulnerability Spec rstack overflow: Not affected

Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl

Vulnerability Spectre v1: Mitigation; usercopy/swaps barriers and __user pointer sanitization

Vulnerability Spectre v2: Mitigation; Enhanced / Automatic IBRS; IBPB conditional; STIBP
always-on; RSB filling; PBRSE-eIBRS Not affected; BHI Not affected

Vulnerability Srbds: Not affected

Vulnerability Tsx async abort: Not affected

Vulnerability Vmscape: Not affected

From lscpu --cache:

(Continued on next page)



SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL325 Gen12

(2.70 GHz, AMD EPYC 9755)

SPECrate®2026_fp_base = 416

SPECrate®2026_fp_peak = 416

CPU2026 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jan-2026

Hardware Availability: Jul-2025

Software Availability: Jan-2026

Platform Notes (Continued)

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
Lld	48K	6M	12	Data	1	64	1	64
Lli	32K	4M	8	Instruction	1	64	1	64
L2	1M	128M	16	Unified	2	1024	1	64
L3	32M	512M	16	Unified	3	32768	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 16 nodes (0-15)
node 0 cpus: 0-7,128-135
node 0 size: 96447 MB
node 0 free: 95898 MB
node 1 cpus: 8-15,136-143
node 1 size: 96762 MB
node 1 free: 96467 MB
node 2 cpus: 16-23,144-151
node 2 size: 96762 MB
node 2 free: 96475 MB
node 3 cpus: 24-31,152-159
node 3 size: 96762 MB
node 3 free: 96470 MB
node 4 cpus: 32-39,160-167
node 4 size: 96762 MB
node 4 free: 96536 MB
node 5 cpus: 40-47,168-175
node 5 size: 96762 MB
node 5 free: 96543 MB
node 6 cpus: 48-55,176-183
node 6 size: 96762 MB
node 6 free: 96534 MB
node 7 cpus: 56-63,184-191
node 7 size: 96762 MB
node 7 free: 96522 MB
node 8 cpus: 64-71,192-199
node 8 size: 96762 MB
node 8 free: 96452 MB
node 9 cpus: 72-79,200-207
node 9 size: 96762 MB
node 9 free: 96530 MB
node 10 cpus: 80-87,208-215
node 10 size: 96762 MB
node 10 free: 96501 MB
node 11 cpus: 88-95,216-223
node 11 size: 96762 MB
node 11 free: 96521 MB
node 12 cpus: 96-103,224-231

```

(Continued on next page)



SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL325 Gen12
(2.70 GHz, AMD EPYC 9755)

SPECrate®2026_fp_base = 416

SPECrate®2026_fp_peak = 416

CPU2026 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jan-2026

Hardware Availability: Jul-2025

Software Availability: Jan-2026

Platform Notes (Continued)

```

node 12 size: 96719 MB
node 12 free: 96449 MB
node 13 cpus: 104-111,232-239
node 13 size: 96762 MB
node 13 free: 96456 MB
node 14 cpus: 112-119,240-247
node 14 size: 96762 MB
node 14 free: 96540 MB
node 15 cpus: 120-127,248-255
node 15 size: 96691 MB
node 15 free: 96441 MB
node distances:
node  0  1  2  3  4  5  6  7  8  9 10 11 12 13 14 15
 0:  10 11 11 11 12 12 12 12 12 12 12 12 12 12 12 12
 1:  11 10 11 11 12 12 12 12 12 12 12 12 12 12 12 12
 2:  11 11 10 11 12 12 12 12 12 12 12 12 12 12 12 12
 3:  11 11 11 10 12 12 12 12 12 12 12 12 12 12 12 12
 4:  12 12 12 12 10 11 11 11 12 12 12 12 12 12 12 12
 5:  12 12 12 12 12 11 10 11 11 12 12 12 12 12 12 12
 6:  12 12 12 12 12 11 11 10 11 12 12 12 12 12 12 12
 7:  12 12 12 12 12 11 11 11 10 12 12 12 12 12 12 12
 8:  12 12 12 12 12 12 12 12 12 10 11 11 11 12 12 12
 9:  12 12 12 12 12 12 12 12 12 11 10 11 11 12 12 12
10:  12 12 12 12 12 12 12 12 12 11 11 10 11 12 12 12
11:  12 12 12 12 12 12 12 12 12 11 11 11 10 12 12 12
12:  12 12 12 12 12 12 12 12 12 12 12 12 12 10 11 11
13:  12 12 12 12 12 12 12 12 12 12 12 12 12 11 10 11
14:  12 12 12 12 12 12 12 12 12 12 12 12 12 11 11 10
15:  12 12 12 12 12 12 12 12 12 12 12 12 12 11 11 10

```

```

-----
9. /proc/meminfo
   MemTotal:          1584915404 kB

```

```

-----
10. who -r
    run-level 5 Jan 29 05:09

```

```

-----
11. Systemd service manager version: systemd 255 (255.4-lubuntu8.12)
    Default Target    Status
    graphical         running

```

```

-----
12. Services, from systemctl list-unit-files
    STATE                UNIT FILES
    enabled              ModemManager apparmor apport blk-availability cloud-config cloud-final cloud-init

```

(Continued on next page)



SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL325 Gen12
(2.70 GHz, AMD EPYC 9755)

SPECrate®2026_fp_base = 416

SPECrate®2026_fp_peak = 416

CPU2026 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jan-2026

Hardware Availability: Jul-2025

Software Availability: Jan-2026

Platform Notes (Continued)

```

cloud-init-local console-setup cron dmesg e2scrub_reap finalrd getty@ gpu-manager
grub-common grub-initrd-fallback keyboard-setup lvm2-monitor multipathd
networkd-dispatcher open-iscsi open-vm-tools pollinate rsyslog secureboot-db setvtrgb
snapd sysstat systemd-networkd systemd-networkd-wait-online systemd-pstore
systemd-resolved thermald tuned ua-reboot-cmds ubuntu-advantage udisks2 ufw
unattended-upgrades vgauth
enabled-runtime netplan-ovs-cleanup systemd-fsck-root systemd-remount-fs
disabled console-getty debug-shell iscsid nftables rsync serial-getty@ ssh
systemd-boot-check-no-failures systemd-confext systemd-network-generator
systemd-networkd-wait-online@ systemd-pcrlock-file-system systemd-pcrlock-firmware-code
systemd-pcrlock-firmware-config systemd-pcrlock-machine-id systemd-pcrlock-make-policy
systemd-pcrlock-secureboot-authority systemd-pcrlock-secureboot-policy systemd-sysex
systemd-time-wait-sync systemd-timesyncd upower
indirect systemd-sysupdate systemd-sysupdate-reboot uuid
masked cryptdisks cryptdisks-early hwclock multipath-tools-boot screen-cleanup sudo x11-common

```

13. Linux kernel boot-time arguments, from /proc/cmdline

```

BOOT_IMAGE=/boot/vmlinuz-6.8.0-90-generic
root=UUID=55095485-7cab-4cdb-a7f6-908dc16f7253
ro

```

14. cpupower frequency-info

```

analyzing CPU 15:
  current policy: frequency should be within 1.50 GHz and 2.70 GHz.
                  The governor "performance" may decide which speed to use
                  within this range.

  boost state support:
    Supported: yes
    Active: yes
    Boost States: 0
    Total States: 3
    Pstate-P0: 2700MHz

```

15. tuned-adm active

Current active profile: balanced

16. sysctl

```

kernel.numa_balancing          1
kernel.randomize_va_space      0
vm.compaction_proactiveness    20
vm.dirty_background_bytes      0
vm.dirty_background_ratio      10
vm.dirty_bytes                  0

```

(Continued on next page)



SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL325 Gen12
(2.70 GHz, AMD EPYC 9755)

SPECrate®2026_fp_base = 416

SPECrate®2026_fp_peak = 416

CPU2026 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jan-2026

Hardware Availability: Jul-2025

Software Availability: Jan-2026

Platform Notes (Continued)

```

vm.dirty_expire_centisecs      3000
vm.dirty_ratio                 8
vm.dirty_writeback_centisecs   500
vm.dirtytime_expire_seconds    43200
vm.extfrag_threshold           500
vm.min_unmapped_ratio          1
vm.nr_hugepages                0
vm.nr_hugepages_mempolicy      0
vm.nr_overcommit_hugepages     0
vm.swappiness                   1
vm.watermark_boost_factor      15000
vm.watermark_scale_factor      10
vm.zone_reclaim_mode           1

```

```

-----
17. /sys/kernel/mm/transparent_hugepage
defrag      [always] defer defer+madvise madvise never
enabled     [always] madvise never
hpage_pmd_size  2097152
shmem_enabled  always within_size advise [never] deny force

```

```

-----
18. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs  60000
defrag                  1
max_ptes_none          511
max_ptes_shared        256
max_ptes_swap          64
pages_to_scan          4096
scan_sleep_millisecs   10000

```

```

-----
19. OS release
From /etc/*-release /etc/*-version
os-release Ubuntu 24.04.3 LTS

```

```

-----
20. Disk information
SPEC is set to: /home/cpu2026
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/nvme1n1p2 ext4  1.5T   32G  1.4T   3% /

```

```

-----
21. /sys/devices/virtual/dmi/id
Vendor:          HPE
Product:         HPE ProLiant Compute DL325 Gen12
Product Family: ProLiant

```

(Continued on next page)



SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL325 Gen12
(2.70 GHz, AMD EPYC 9755)

SPECrate®2026_fp_base = 416

SPECrate®2026_fp_peak = 416

CPU2026 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jan-2026

Hardware Availability: Jul-2025

Software Availability: Jan-2026

Platform Notes (Continued)

Serial: OU2MZL2EWE

22. dmidecode

Additional information from dmidecode 3.5 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

4x Samsung M321RAJA0MB2-CCPEC 128 GB 2 rank 6400, configured at 5200
6x Samsung M321RAJA0MB2-CCPKC 128 GB 2 rank 6400, configured at 5200
2x Samsung M321RAJA0MB2-CCPPC 128 GB 2 rank 6400, configured at 5200

23. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: HPE
BIOS Version: 1.34
BIOS Date: 11/28/2025
BIOS Revision: 1.34
Firmware Revision: 1.18

Compiler Version Notes

=====
C | 782.lbm_r(base)
=====

AMD clang version 17.0.6 (CLANG: AOCC_5.1.0-Build#1994 2025_12_23)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-5.1.0/bin
=====

=====
C++ | 731.astcenc_r(base) 736.ocio_r(base) 748.flightdm_r(base)
| 766.femflow_r(base) 767.nest_r(base) 772.marian_r(base)
=====

AMD clang version 17.0.6 (CLANG: AOCC_5.1.0-Build#1994 2025_12_23)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-5.1.0/bin
=====

=====
C++, C | 709.cactus_r(base) 737.gmsh_r(base)
=====

(Continued on next page)



SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL325 Gen12
(2.70 GHz, AMD EPYC 9755)

SPECrate®2026_fp_base = 416

SPECrate®2026_fp_peak = 416

CPU2026 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jan-2026

Hardware Availability: Jul-2025

Software Availability: Jan-2026

Compiler Version Notes (Continued)

```

-----
AMD clang version 17.0.6 (CLANG: AOCC_5.1.0-Build#1994 2025_12_23)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-5.1.0/bin
-----

```

```

=====
Fortran | 722.palm_r(base) 749.fotonik3d_r(base) 765.roms_r(base)
-----

```

```

-----
AMD clang version 17.0.6 (CLANG: AOCC_5.1.0-Build#1994 2025_12_23)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-5.1.0/bin
-----

```

Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Benchmarks using both C and C++:

clang++ clang

Base Portability Flags

```

709.cactus_r: -DSPEC_LP64
722.palm_r: -DSPEC_LP64
731.ascenc_r: -DSPEC_LP64
736.ocio_r: -fno-finite-math-only -DSPEC_LP64
737.gmsh_r: -fno-fast-math -DSPEC_LP64
748.flightdm_r: -fno-reciprocal-math -DSPEC_LP64
749.fotonik3d_r: -DSPEC_LP64
765.roms_r: -DSPEC_LP64
766.femflow_r: -DSPEC_LP64
767.nest_r: -fno-finite-math-only -DSPEC_LP64
772.marian_r: -DSPEC_LP64

```

(Continued on next page)



SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL325 Gen12

(2.70 GHz, AMD EPYC 9755)

SPECrate®2026_fp_base = 416

SPECrate®2026_fp_peak = 416

CPU2026 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Jan-2026
Hardware Availability: Jul-2025
Software Availability: Jan-2026

Base Portability Flags (Continued)

782.lbm_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

```
-m64 -std=c18 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-ldist-scalar-expand -fenable-aggressive-gather
-ffast-math -O3 -march=znver5 -fveclib=AMDLIBM -fno-PIE -no-pie
-flto -fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining
-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lamdalloc
-lflang
```

C++ benchmarks:

```
-m64 -std=c++17 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Wl,-mllvm -Wl,-extra-inliner
-ffast-math -O3 -march=znver5 -fveclib=AMDLIBM -flto
-mllvm -unroll-threshold=100 -mllvm -loop-unswitch-threshold=200000
-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lamdalloc
-lflang
```

Fortran benchmarks:

```
-m64 -Mstandard -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-aggressive-gather=true
-Wl,-mllvm -Wl,-enable-masked-gather-sequence=false -ffast-math -O3
-march=znver5 -fveclib=AMDLIBM -flto -Mrecursive -funroll-loops
-mllvm -lsr-in-nested-loop -mllvm -reduce-array-computations=3
-fepilog-vectorization-of-inductions -zopt -lamdlibm -lamdalloc
-lflang
```

Benchmarks using both C and C++:

```
-m64 -std=c++17 -std=c18 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Wl,-mllvm -Wl,-extra-inliner
-ffast-math -O3 -march=znver5 -fveclib=AMDLIBM -fno-PIE -no-pie
-flto -fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining
-mllvm -reduce-array-computations=3 -zopt -mllvm -unroll-threshold=100
-mllvm -loop-unswitch-threshold=200000 -lamdlibm -lamdalloc -lflang
```



SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL325 Gen12

(2.70 GHz, AMD EPYC 9755)

SPECrate®2026_fp_base = 416

SPECrate®2026_fp_peak = 416

CPU2026 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jan-2026

Hardware Availability: Jul-2025

Software Availability: Jan-2026

Peak Optimization Flags

C benchmarks:

782.lbm_r: basepeak = yes

C++ benchmarks:

731.astcenc_r: basepeak = yes

736.ocio_r: basepeak = yes

748.flightdm_r: basepeak = yes

766.femflow_r: basepeak = yes

767.nest_r: basepeak = yes

772.marian_r: basepeak = yes

Fortran benchmarks:

722.palm_r: basepeak = yes

749.fotonik3d_r: basepeak = yes

765.roms_r: basepeak = yes

Benchmarks using both C and C++:

709.cactus_r: basepeak = yes

737.gmsh_r: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2026/results/flags/HPE-Platform-Flags-AMD-Turin-rev1.11.html>

<http://www.spec.org/cpu2026/results/flags/aocc-flags.2026-05-04.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2026/results/flags/HPE-Platform-Flags-AMD-Turin-rev1.11.xml>

<http://www.spec.org/cpu2026/results/flags/aocc-flags.2026-05-04.xml>



SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL325 Gen12

(2.70 GHz, AMD EPYC 9755)

SPECrate®2026_fp_base = 416

SPECrate®2026_fp_peak = 416

CPU2026 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jan-2026

Hardware Availability: Jul-2025

Software Availability: Jan-2026

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2026 v0.902.0 on 2026-01-29 01:49:03-0500.
Report generated on 2026-05-11 16:37:43 by CPU2026 PDF formatter (unknown).
Originally published on 2026-05-05.