



SPEC CPU®2026 Floating Point Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

xFusion

SPECspeed®2026_fp_base = 13.5

FusionServer 1288 V8 (Intel Xeon 6787P)

SPECspeed®2026_fp_peak = Not Run

CPU2026 License: 6488


Test Sponsor: xFusion

Tested by: xFusion

Test Date: Jul-2026

Hardware Availability: May-2025

Software Availability: Apr-2026

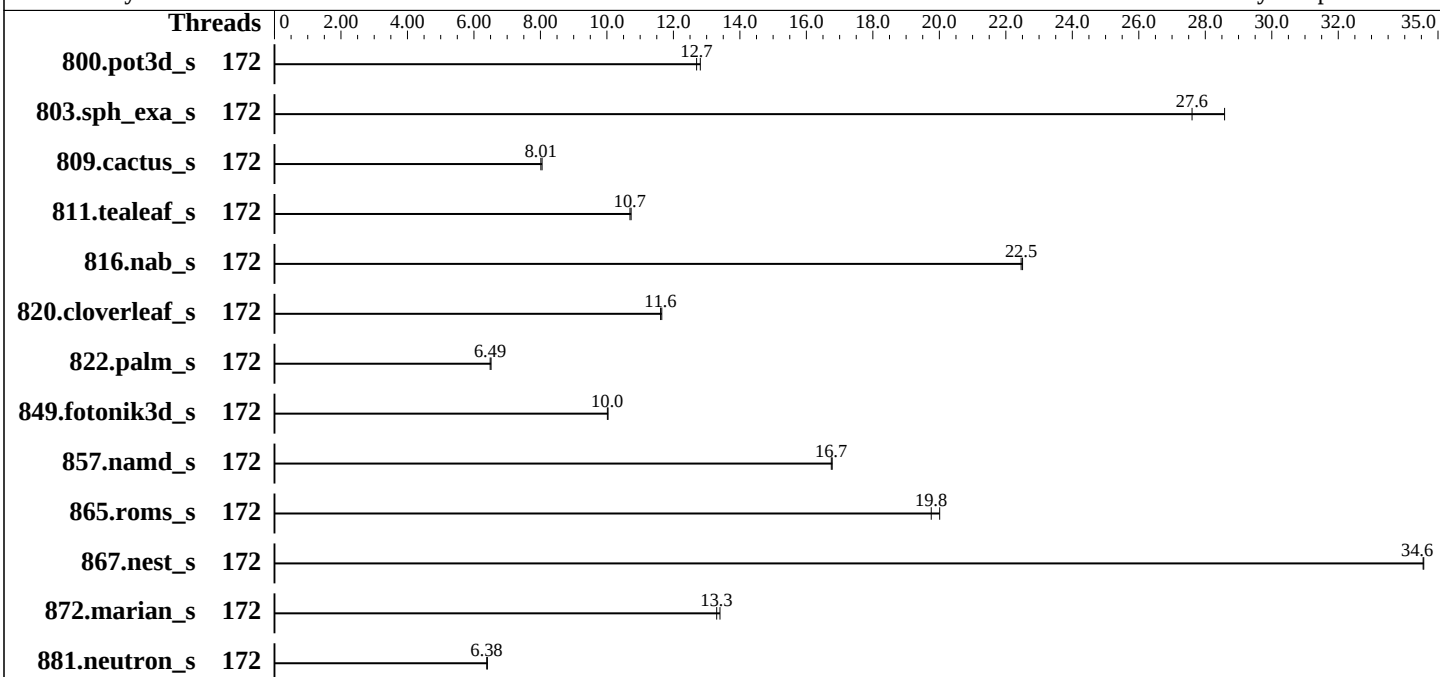

Hardware

CPU Name: Intel Xeon 6787P
Max MHz: 3800
Nominal: 2000
Enabled: 172 cores, 2 chips
Orderable: 1,2 chips
Cache L1: 64 KB I + 48 KB D on chip per core
L2: 2 MB I+D on chip per core
L3: 336 MB I+D on chip per chip
Other: None
Memory: 1 TB (16 x 64 GB 2Rx4 PC5-88/64B-H, running at 8000)
Storage: 1 x 3.84 TB SATA SSD
Cooling: Air
Other: None

Software

OS: Red Hat Enterprise Linux 9.4 (Plow)
5.14.0-427.13.1.el9_4.x86_64
Compiler: C/C++: Version 2026.0 of Intel oneAPI DPC++/C++ Compiler for Linux;
Fortran: Version 2026.0 of Intel Fortran Compiler for Linux
Compiler Category: Vendor
Firmware: Version 01.31.02.23 released May-2026
File System: xfs
System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: Not Applicable
Other: jemalloc memory allocator v5.3
Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.



SPEC CPU®2026 Floating Point Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

xFusion

SPECspeed®2026_fp_base = 13.5

FusionServer 1288 V8 (Intel Xeon 6787P)

SPECspeed®2026_fp_peak = Not Run

CPU2026 License: 6488

Test Sponsor: xFusion

Tested by: xFusion

Test Date: Jul-2026

Hardware Availability: May-2025

Software Availability: Apr-2026

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
800.pot3d_s	172	53.0	12.7	52.5	12.8									
803.sph_exa_s	172	43.3	28.6	44.9	27.6									
809.cactus_s	172	140	8.01	139	8.05									
811.tealeaf_s	172	51.9	10.7	52.1	10.7									
816.nab_s	172	50.1	22.5	50.0	22.5									
820.cloverleaf_s	172	73.8	11.6	73.6	11.7									
822.palm_s	172	189	6.49	188	6.51									
849.fotonik3d_s	172	65.9	10.0	65.8	10.0									
857.namd_s	172	86.7	16.7	86.5	16.8									
865.roms_s	172	54.5	20.0	55.2	19.8									
867.nest_s	172	62.5	34.6	62.5	34.6									
872.marian_s	172	80.7	13.4	81.3	13.3									
881.neutron_s	172	127	6.40	128	6.38									

SPECspeed®2026_fp_base = 13.5

SPECspeed®2026_fp_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"
tuned-adm profile was set to throughput-performance using "tuned-adm profile throughput-performance"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

KMP_AFFINITY = "granularity=fine,scatter"

LD_LIBRARY_PATH = "/home/cpu2026/lib"

MALLOC_CONF = "retain:true"

OMP_STACKSIZE = "192M"

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM
memory using CentOS Stream 9.

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

sync; echo 3> /proc/sys/vm/drop_caches

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)

(Continued on next page)



SPEC CPU®2026 Floating Point Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

xFusion

SPECspeed®2026_fp_base = 13.5

FusionServer 1288 V8 (Intel Xeon 6787P)

SPECspeed®2026_fp_peak = Not Run

CPU2026 License: 6488

Test Sponsor: xFusion

Tested by: xFusion

Test Date: Jul-2026

Hardware Availability: May-2025

Software Availability: Apr-2026

General Notes (Continued)

is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation

built with the CentOS Stream 9, and the system compiler gcc 11.5.0

sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Platform Notes

BIOS configuration:

Performance Profile Set to Load Balance

Enable LP [Global] Set to Single LP

LLC Prefetch Set to Enabled

Adjacent Cache Prefetch Set to Disabled

SNC Set to Disabled

Latency Optimized Mode Set to Enabled

Sysinfo program /home/cpu2026/bin/sysinfo

Rev: 779ab21020787073335a329f3a45e2cd

running on localhost Wed Jul 22 17:01:27 2026

SUT (System Under Test) info as seen by some common utilities.

Table of contents

-
1. uname -srv
 2. w
 3. Username
 4. ulimit -a
 5. sysinfo process ancestry
 6. /proc/cpuinfo
 7. lscpu
 8. numactl --hardware
 9. /proc/meminfo
 10. who -r
 11. Systemd service manager version: systemd 252 (252-32.el9_4)
 12. Services, from systemctl list-unit-files
 13. Linux kernel boot-time arguments, from /proc/cmdline
 14. cpupower frequency-info
 15. tuned-adm active
 16. sysctl
 17. /sys/kernel/mm/transparent_hugepage
 18. /sys/kernel/mm/transparent_hugepage/khugepaged
 19. OS release
 20. Disk information

(Continued on next page)



SPEC CPU®2026 Floating Point Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

xFusion

SPECspeed®2026_fp_base = 13.5

FusionServer 1288 V8 (Intel Xeon 6787P)

SPECspeed®2026_fp_peak = Not Run

CPU2026 License: 6488

Test Sponsor: xFusion

Tested by: xFusion

Test Date: Jul-2026

Hardware Availability: May-2025

Software Availability: Apr-2026

Platform Notes (Continued)

21. /sys/devices/virtual/dmi/id

22. dmidecode

23. BIOS

1. uname -srvnm

Linux 5.14.0-427.13.1.el9_4.x86_64 #1 SMP PREEMPT_DYNAMIC Wed Apr 10 10:29:16 EDT 2024 x86_64

2. w

17:01:27 up 2 min, 1 user, load average: 0.20, 0.16, 0.07

USER	TTY	LOGIN@	IDLE	JCPU	PCPU	WHAT
root	tty1	17:01	15.00s	2.09s	0.03s	sh speed-2026.sh

3. Username

From environment variable \$USER: root

4. ulimit -a

real-time non-blocking time	(microseconds, -R)	unlimited
core file size	(blocks, -c)	0
data seg size	(kbytes, -d)	unlimited
scheduling priority	(-e)	0
file size	(blocks, -f)	unlimited
pending signals	(-i)	4124405
max locked memory	(kbytes, -l)	64
max memory size	(kbytes, -m)	unlimited
open files	(-n)	1024
pipe size	(512 bytes, -p)	8
POSIX message queues	(bytes, -q)	819200
real-time priority	(-r)	0
stack size	(kbytes, -s)	unlimited
cpu time	(seconds, -t)	unlimited
max user processes	(-u)	4124405
virtual memory	(kbytes, -v)	unlimited
file locks	(-x)	unlimited

5. sysinfo process ancestry

/usr/lib/systemd/systemd --switched-root --system --deserialize 31

login -- root

-bash

sh speed-2026.sh

runcpu --nobuild --reportable --action validate --define default-platform-flags -c

ic2026.0-graniterapids-cpu2026-1.0.1-speed-20260429.cfg --threads 172 --define cores=172 -o all --define

(Continued on next page)



SPEC CPU®2026 Floating Point Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

xFusion

SPECspeed®2026_fp_base = 13.5

FusionServer 1288 V8 (Intel Xeon 6787P)

SPECspeed®2026_fp_peak = Not Run

CPU2026 License: 6488

Test Sponsor: xFusion

Tested by: xFusion

Test Date: Jul-2026

Hardware Availability: May-2025

Software Availability: Apr-2026

Platform Notes (Continued)

```
drop_caches fpspeed --tune base
runcpu --nobuild --reportable --action validate --define default-platform-flags --configfile
ic2026.0-graniterapids-cpu2026-1.0.1-speed-20260429.cfg --threads 172 --define cores=172 --output_format
all --define drop_caches --tune base --nopower --runmode speed --tune base --size refspeed fpspeed
--nopreenv --note-preenv --logfile $SPEC/tmp/CPU2026.001/templots/preenv.fpspeed.001.0.log --lognum 001.0
--from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2026
```

6. /proc/cpuinfo

```
model name      : Intel(R) Xeon(R) 6787P
vendor_id       : GenuineIntel
cpu family      : 6
model           : 173
stepping        : 1
microcode       : 0x1000405
bugs            : spectre_v1 spectre_v2 spec_store_bypass swapgs
cpu cores       : 86
siblings        : 86
2 physical ids (chips)
172 processors (hardware threads)
physical id 0:  core ids 0-42,64-106
physical id 1:  core ids 0-42,64-106
physical id 0:  apicids
0,2,4,6,8,10,12,14,16,18,20,22,24,26,28,30,32,34,36,38,40,42,44,46,48,50,52,54,56,58,60,62,64,66,68,70,72
,74,76,78,80,82,84,128,130,132,134,136,138,140,142,144,146,148,150,152,154,156,158,160,162,164,166,168,17
0,172,174,176,178,180,182,184,186,188,190,192,194,196,198,200,202,204,206,208,210,212
physical id 1:  apicids
256,258,260,262,264,266,268,270,272,274,276,278,280,282,284,286,288,290,292,294,296,298,300,302,304,306,3
08,310,312,314,316,318,320,322,324,326,328,330,332,334,336,338,340,384,386,388,390,392,394,396,398,400,40
2,404,406,408,410,412,414,416,418,420,422,424,426,428,430,432,434,436,438,440,442,444,446,448,450,452,454
,456,458,460,462,464,466,468
```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.37.4:

```
Architecture:      x86_64
CPU op-mode(s):    32-bit, 64-bit
Address sizes:      52 bits physical, 57 bits virtual
Byte Order:         Little Endian
CPU(s):             172
On-line CPU(s) list: 0-171
Vendor ID:          GenuineIntel
```

(Continued on next page)



SPEC CPU®2026 Floating Point Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

xFusion

SPECspeed®2026_fp_base = 13.5

FusionServer 1288 V8 (Intel Xeon 6787P)

SPECspeed®2026_fp_peak = Not Run

CPU2026 License: 6488

Test Sponsor: xFusion

Tested by: xFusion

Test Date: Jul-2026

Hardware Availability: May-2025

Software Availability: Apr-2026

Platform Notes (Continued)

BIOS Vendor ID: Intel(R) Corporation
Model name: Intel(R) Xeon(R) 6787P
BIOS Model name: Intel(R) Xeon(R) 6787P
CPU family: 6
Model: 173
Thread(s) per core: 1
Core(s) per socket: 86
Socket(s): 2
Stepping: 1
BogoMIPS: 4000.00

Flags:

fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb
rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good nopl
xtopology nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq
dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm
pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave
avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2
cdp_l3 cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow
flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 avx2 smep bmi2
erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma
clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt
xsaves xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
split_lock_detect avx_vnni avx512_bf16 wbnoinvd dtherm ida arat pln pts
vnni avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni vaes
vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57 rdpid
bus_lock_detect cldemote movdiri movdir64b enqcmd fsrm md_clear
serialize tsxldtrk pconfig arch_lbr ibt amx_bf16 avx512_fp16 amx_tile
amx_int8 flush_l1d arch_capabilities

Virtualization: VT-x
L1d cache: 8.1 MiB (172 instances)
L1i cache: 10.8 MiB (172 instances)
L2 cache: 344 MiB (172 instances)
L3 cache: 672 MiB (2 instances)
NUMA node(s): 2
NUMA node0 CPU(s): 0-85
NUMA node1 CPU(s): 86-171
Vulnerability Gather data sampling: Not affected
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Retbleed: Not affected
Vulnerability Spec rstack overflow: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced / Automatic IBRS, IBPB conditional, RSB filling,

(Continued on next page)



SPEC CPU®2026 Floating Point Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

xFusion

SPECspeed®2026_fp_base = 13.5

FusionServer 1288 V8 (Intel Xeon 6787P)

SPECspeed®2026_fp_peak = Not Run

CPU2026 License: 6488

Test Sponsor: xFusion

Tested by: xFusion

Test Date: Jul-2026

Hardware Availability: May-2025

Software Availability: Apr-2026

Platform Notes (Continued)

Vulnerability Srbds:

PBRSE-eIBRS Not affected

Vulnerability Tsx async abort:

Not affected

Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	8.1M	12	Data	1	64	1	64
L1i	64K	10.8M	16	Instruction	1	64	1	64
L2	2M	344M	16	Unified	2	2048	1	64
L3	336M	672M	16	Unified	3	344064	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 2 nodes (0-1)

node 0 cpus: 0-85

node 0 size: 515081 MB

node 0 free: 513820 MB

node 1 cpus: 86-171

node 1 size: 516059 MB

node 1 free: 514770 MB

node distances:

node 0 1

0: 10 21

1: 21 10

9. /proc/meminfo

MemTotal: 1055888120 kB

10. who -r

run-level 3 Jul 22 16:59

11. Systemd service manager version: systemd 252 (252-32.el9_4)

Default Target Status

multi-user running

12. Services, from systemctl list-unit-files

STATE

UNIT FILES

enabled	NetworkManager NetworkManager-dispatcher NetworkManager-wait-online auditd chronyd crond dbus-broker getty@ insights-client-boot irqbalance kdump low-memory-monitor mdmonitor microcode nis-domainname rhsmcertd rsyslog rtkit-daemon selinux-autorelabel-mark sshd sssd systemd-boot-update systemd-network-generator tuned udisks2 upower
enabled-runtime	systemd-remount-fs

(Continued on next page)



SPEC CPU®2026 Floating Point Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

xFusion

SPECspeed®2026_fp_base = 13.5

FusionServer 1288 V8 (Intel Xeon 6787P)

SPECspeed®2026_fp_peak = Not Run

CPU2026 License: 6488

Test Sponsor: xFusion

Tested by: xFusion

Test Date: Jul-2026

Hardware Availability: May-2025

Software Availability: Apr-2026

Platform Notes (Continued)

disabled canberra-system-bootup canberra-system-shutdown canberra-system-shutdown-reboot
chrony-wait chronyd-restricted console-getty cpupower debug-shell dnf-system-upgrade
firewalld kvm_stat man-db-restart-cache-update nftables pesign rdisc rhcd rhsm rhsm-facts
rpmdb-rebuild selinux-check-proper-disable serial-getty@ sshd-keygen@
systemd-boot-check-no-failures systemd-pstore systemd-sysex
indirect sssd-autofs sssd-kcm sssd-nss sssd-pac sssd-pam sssd-ssh sssd-sudo systemd-sysupdate
systemd-sysupdate-reboot

13. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=(hd0,gpt3)/boot/vmlinuz-5.14.0-427.13.1.el9_4.x86_64
root=UUID=6e68be6b-7476-48d7-b5fd-4f52d789df33
ro
crashkernel=1G-4G:192M,4G-64G:256M,64G-:512M
resume=UUID=b288481a-71cc-4ab0-8cb3-70564a1c1698

14. cpupower frequency-info
analyzing CPU 21:
Unable to determine current policy
boost state support:
Supported: yes
Active: yes

15. tuned-adm active
Current active profile: throughput-performance

16. sysctl
kernel.numa_balancing 1
kernel.randomize_va_space 2
vm.compaction_proactiveness 20
vm.dirty_background_bytes 0
vm.dirty_background_ratio 10
vm.dirty_bytes 0
vm.dirty_expire_centisecs 3000
vm.dirty_ratio 40
vm.dirty_writeback_centisecs 500
vm.dirtytime_expire_seconds 43200
vm.extfrag_threshold 500
vm.min_unmapped_ratio 1
vm.nr_hugepages 0
vm.nr_hugepages_mempolicy 0
vm.nr_overcommit_hugepages 0
vm.swappiness 10
vm.watermark_boost_factor 15000

(Continued on next page)



SPEC CPU®2026 Floating Point Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

xFusion

SPECspeed®2026_fp_base = 13.5

FusionServer 1288 V8 (Intel Xeon 6787P)

SPECspeed®2026_fp_peak = Not Run

CPU2026 License: 6488

Test Sponsor: xFusion

Tested by: xFusion

Test Date: Jul-2026

Hardware Availability: May-2025

Software Availability: Apr-2026

Platform Notes (Continued)

vm.watermark_scale_factor 10
vm.zone_reclaim_mode 0

17. /sys/kernel/mm/transparent_hugepage
defrag always defer defer+madvice [madvice] never
enabled [always] madvice never
hpage_pmd_size 2097152
shmem_enabled always within_size advise [never] deny force

18. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs 60000
defrag 1
max_ptes_none 511
max_ptes_shared 256
max_ptes_swap 64
pages_to_scan 4096
scan_sleep_millisecs 10000

19. OS release
From /etc/*-release /etc/*-version
os-release Red Hat Enterprise Linux 9.4 (Plow)
redhat-release Red Hat Enterprise Linux release 9.4 (Plow)
system-release Red Hat Enterprise Linux release 9.4 (Plow)

20. Disk information
SPEC is set to: /home/cpu2026
Filesystem Type Size Used Avail Use% Mounted on
/dev/sda3 xfs 1.0T 70G 954G 7% /

21. /sys/devices/virtual/dmi/id
Vendor: XFUSION
Product: 1288 V8
Product Family: Birch Stream

22. dmidecode
Additional information from dmidecode 3.5 follows. WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
"DMTF SMBIOS" standard.
Memory:
1x Hynix HMC94BDJHA380N 64 GB 2 rank 8800, configured at 8000

(Continued on next page)



SPEC CPU®2026 Floating Point Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

xFusion

SPECspeed®2026_fp_base = 13.5

FusionServer 1288 V8 (Intel Xeon 6787P)

SPECspeed®2026_fp_peak = Not Run

CPU2026 License: 6488

Test Sponsor: xFusion

Tested by: xFusion

Test Date: Jul-2026

Hardware Availability: May-2025

Software Availability: Apr-2026

Platform Notes (Continued)

2x Hynix HMC94BDJHA383N 64 GB 2 rank 8800, configured at 8000
6x Hynix HMC94BDJHA462N 64 GB 2 rank 8800, configured at 8000
7x Hynix HMC94BDJHA464N 64 GB 2 rank 8800, configured at 8000

23. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: XFUSION
BIOS Version: 01.31.02.23
BIOS Date: 05/31/2026
BIOS Revision: 2.23

Compiler Version Notes

=====
C | 811.tealeaf_s(base) 816.nab_s(base) 881.neutron_s(base)
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2026.0.0 Build 20260331
Copyright (C) 1985-2026 Intel Corporation. All rights reserved.
=====

=====
C++ | 803.sph_exa_s(base) 857.namd_s(base) 867.nest_s(base)
| 872.marian_s(base)
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2026.0.0 Build 20260331
Copyright (C) 1985-2026 Intel Corporation. All rights reserved.
=====

=====
C++, C | 809.cactus_s(base)
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2026.0.0 Build 20260331
Copyright (C) 1985-2026 Intel Corporation. All rights reserved.
=====

=====
Fortran | 800.pot3d_s(base) 820.cloverleaf_s(base) 822.palm_s(base)
| 849.fotonik3d_s(base) 865.roms_s(base)
=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version
2026.0.0 Build 20260331

(Continued on next page)



SPEC CPU®2026 Floating Point Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

xFusion

SPECspeed®2026_fp_base = 13.5

FusionServer 1288 V8 (Intel Xeon 6787P)

SPECspeed®2026_fp_peak = Not Run

CPU2026 License: 6488

Test Sponsor: xFusion

Tested by: xFusion

Test Date: Jul-2026

Hardware Availability: May-2025

Software Availability: Apr-2026

Compiler Version Notes (Continued)

Copyright (C) 1985-2026 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Benchmarks using both C and C++:

icpx icx

Base Optimization Flags

C benchmarks:

-m64 -std=c18 -Wl,-z,muldefs -Wl,-plugin-opt=-inline-threshold=1500
-xgraniterapids -mprefer-vector-width=512 -O3 -ffp-model=fast -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp
-DSPEC_OPENMP -L/usr/local/jemalloc-5.3.0/lib -ljemalloc

C++ benchmarks:

-m64 -std=c++17 -Wl,-z,muldefs -Wl,-plugin-opt=-inline-threshold=1500
-xgraniterapids -mprefer-vector-width=512 -O3 -ffp-model=fast -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -pthread
-fiopenmp -DSPEC_OPENMP -L/usr/local/jemalloc-5.3.0/lib -ljemalloc

Fortran benchmarks:

-m64 -stand f18 -Wl,-z,muldefs -Wl,-plugin-opt=-inline-threshold=1500
-xgraniterapids -mprefer-vector-width=512 -O3 -ffp-model=fast -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -DSPEC_OPENMP
-fiopenmp -L/usr/local/jemalloc-5.3.0/lib -ljemalloc

Benchmarks using both C and C++:

-m64 -std=c++17 -std=c18 -Wl,-z,muldefs
-Wl,-plugin-opt=-inline-threshold=1500 -xgraniterapids
-mprefer-vector-width=512 -O3 -ffp-model=fast -flto -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4 -fiopenmp -DSPEC_OPENMP
-pthread -L/usr/local/jemalloc-5.3.0/lib -ljemalloc



SPEC CPU®2026 Floating Point Speed Result

Copyright 2026 Standard Performance Evaluation Corporation

xFusion

SPECspeed®2026_fp_base = 13.5

FusionServer 1288 V8 (Intel Xeon 6787P)

SPECspeed®2026_fp_peak = Not Run

CPU2026 License: 6488

Test Sponsor: xFusion

Tested by: xFusion

Test Date: Jul-2026

Hardware Availability: May-2025

Software Availability: Apr-2026

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2026/results/flags/xFusion-Platform-Settings-GNR-V1.7.html>

<http://www.spec.org/cpu2026/results/flags/Intel-ic2025-official-linux64.2026-08-11.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2026/results/flags/xFusion-Platform-Settings-GNR-V1.7.xml>

<http://www.spec.org/cpu2026/results/flags/Intel-ic2025-official-linux64.2026-08-11.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2026 v1.0.1 on 2026-07-22 05:01:25-0400.

Report generated on 2026-08-11 18:26:55 by CPU2026 PDF formatter (unknown).

Originally published on 2026-08-11.