SPEC CFP95 Results

©Copyright 1995, Standard Performance Evaluation Corporation

Siemens Nixdorf Informationssysteme PRIMERGY-550

SPECfp95 = 2.16

SPECfp_base95 = 2.16

SPEC license # 22	Tested By: SNI, Augsburg / Germany	Test Date: Feb-96	Hardware Avail: Mar-96	Software Avail: Feb-96

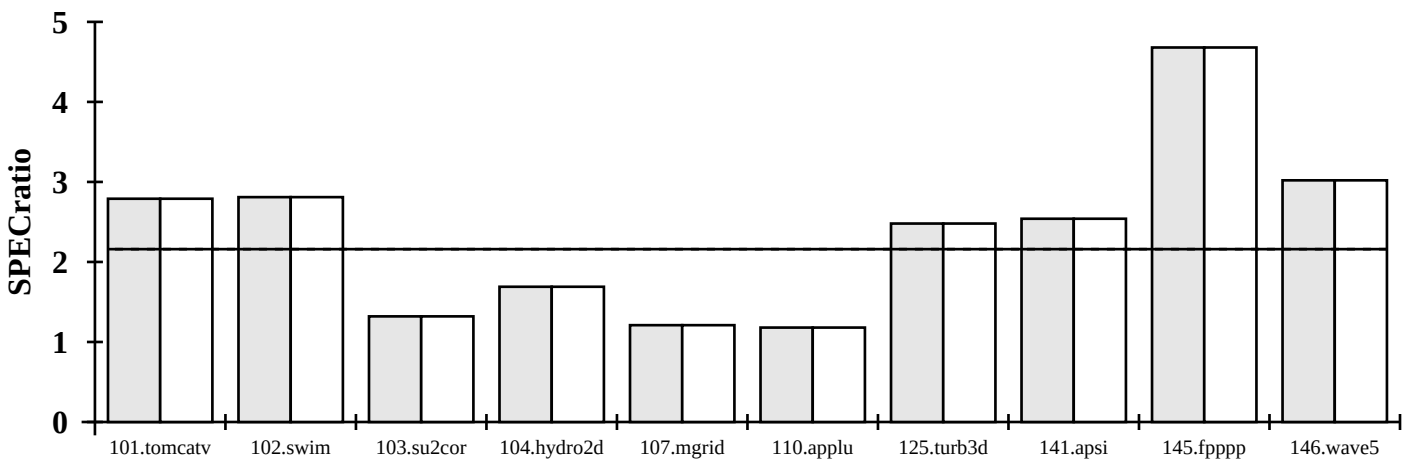

Hardware/Software Configuration for:
PRIMERGY-550

Hardware

Model Name:	PRIMERGY-550
CPU:	133 MHz Pentium
FPU:	Integrated
Number of CPU(s):	1
Primary Cache:	8KBI+8KBD on chip
Secondary Cache:	512KB(I+D) off chip
Other Cache:	None
Memory:	128MB
Disk Subsystem:	2 x 2 GB
Other Hardware:	Mylex DAC960 Controller

Software

Operating System:	Unixware 2.1
Compiler:	Intel Reference Compiler 2.2 Beta
File System:	UFS,VXFS
System State:	Single User

Benchmark # and Name	Reference Time	Base Run Time	Base SPEC Ratio	Run Time	SPEC Ratio
101.tomcatv	3700	1326	2.79	1326	2.79
102.swim	8600	3057	2.81	3057	2.81
103.su2cor	1400	1058	1.32	1058	1.32
104.hydro2d	2400	1418	1.69	1418	1.69
107.mgrid	2500	2062	1.21	2062	1.21
110.applu	2200	1860	1.18	1860	1.18
125.turb3d	4100	1654	2.48	1654	2.48
141.apsi	2100	828	2.54	828	2.54
145.fpppp	9600	2052	4.68	2052	4.68
146.wave5	3000	993	3.02	993	3.02
SPECfp_base95 (G. Mean)			2.16		
		SPECfp95 (G. Mean)			2.16

Notes/Tuning Information

```
Compiled by Intel
Base and peak flags are the same
Base: -tp p5 -ipo -pc 64 -nofdiv_check
```

For More Information Contact:
SPEC
10754 Ambassador Drive, Suite 201
Manassas, VA 22110
(703) 331-0180
info@specbench.org
http://www.specbench.org